


Hydra-Slide Heavy Track Skidding System | 500 Ton | HT500 | Hydraulic Skidding System


HT System Features

- A safer alternative to overhead lifting or rollers.
- No come-a-longs, winch lines, or hold backs required.
- Fully bi-directional track.
- Simple lug and pin connections.
- Cylinders automatically reset into ratchet tracks.
- Low profile – perfect for areas with limited space/access.
- Leap frog tracks to move longer distances.
- Track will carry loads over unsupported spans.
- Durable low-maintenance graphite slide surface.
- Safety stop blocks.
- Can be operated with most 10,000 psi double-acting pumps, but synchronous pumps are recommended.

Specifications									
Model	System Capacity (Tons)	Height (in)	Width (in)	Track Section Length (ft)	Track Section Weight (lbs/ft)	Load Bearing Track	Skid Shoe Size (in)	Maximum Pressure (PSI)	Skidding Speed (ft/hr)
HT500	500	8	21	10, 15 & 19' 2"	173	Yes	24 x 18	10000	55*

*Skidding speed determined using SPU-4D HPU
Green shading reflects rental inventory.

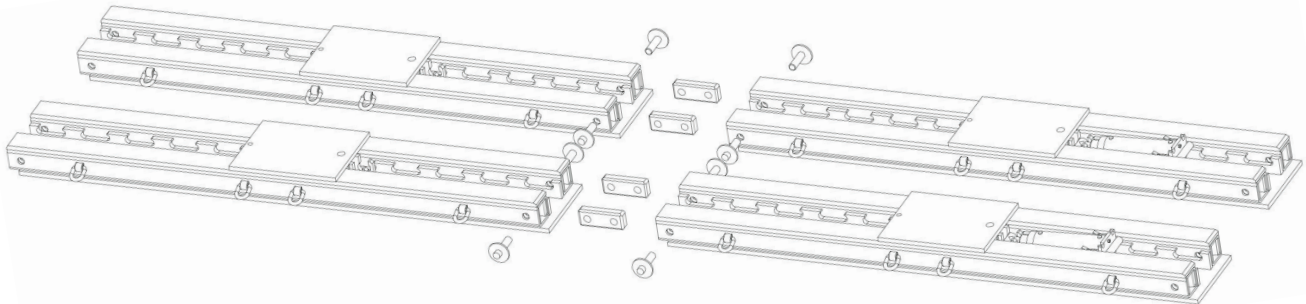

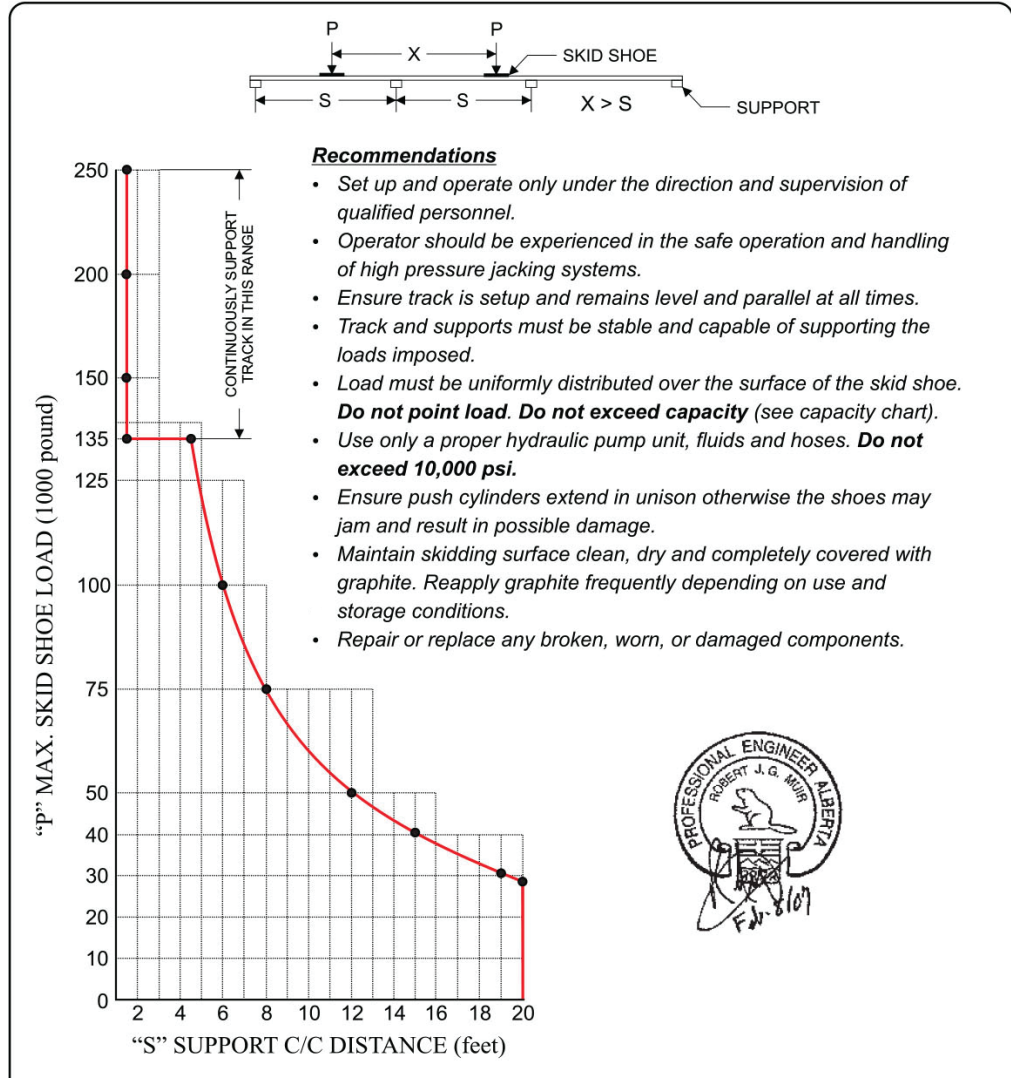HT500 TRACK CAPACITY CHART

500 TON HYDRA-SLIDE
