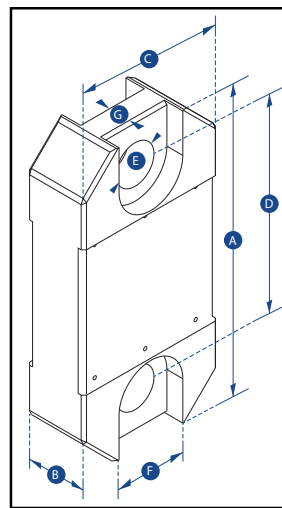


Digital Load Links | 2,200Lbs. – 220,000Lbs. | RLP Series | T24 Models


Model RLP25T


- Internal antenna
- Compact size
- Remote on-off
- Lightweight aluminum
- 100 Hz Peak hold
- Advanced options available
- Push button tare
- Design validated by F.E.A.
- Units are DNV GL approved

- Proprietary 2.4 GHz wireless
- Industry leading wireless range of 700m/2300ft
- Error free data transmission
- Unrivaled resolution
- Environmentally sealed to IP67/NEMA6
- 90db Audible overload alarm
- Unmatched battery life of 1200hrs

Dimensions										
Model	A	B	C	D	ØE	F	G	Crosby Shackle	Loading Pin Ø	
RLP1T	8.03"	1.69"	3.98"	5.75"	0.96"	1.89"	0.75"	G2130	3/4"	
RLP6T5	9.80"	1.69"	3.98"	6.50"	1.50"	2.60"	1.26"	G2130	1"	
RLP12T	12.01"	1.85"	3.98"	7.60"	1.87"	Not relevant in this capacity.		G2130	1 3/8"	
RLP25T	13.39"	2.36"	4.53"	8.46"	2.17"			G2130	2"	
RLP55T	16.69"	2.95"	6.42"	9.06"	2.99"			G2140	2 1/4"	
RLP100T	23.94"	3.90"	10.04"	12.60"	4.29"			G2140	3 1/4"	

Green shading reflects rental inventory.
* RLP500T is not DNV certified.

Specifications														
Model	Capacity (Lbs.)	Resolution	Units	Weight	Safety Factor	Battery Type	Battery Life	Display Type	Operating Temp	Accuracy	Frequency	System Range	Data Rate	Protection
RLP1T	2,200	1lb	lb	3.1	12:1	Handheld 2 x AA/Load cell 4 x AA	Handheld 60 hours/ Load cell 1200 hours continuous	6 digit 25mm / 1" LCD	-10°C to +50°C / 14°F to 122°F	0.1% of full scale	2.4 GHz	2,300 ft.	3 Hz – up to 200 Hz can be ordered for dynamic load monitoring applications	IP67 / NEMA 6
RLP6T5	13,000	2lb	lb	4.4lb	5:1									
RLP12T	26,000	5lb	lb	7.1lb	5:1									
RLP25T	55,000	10lb	lb	11lb	5:1									
RLP55T	110,000	20lb	lb	25.3lb	5:1									
RLP100T	220,000	100lb	lb	75lb	5:1									

Green shading reflects rental inventory.
* RLP500T is not DNV certified.