



## Roundslings | 2,600 - 90,000 Lbs. (Vertical) | EN Series

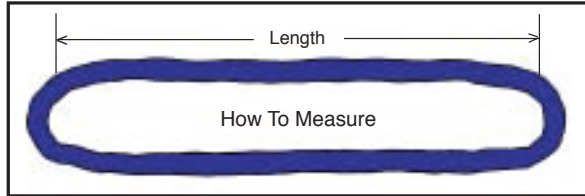

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°.

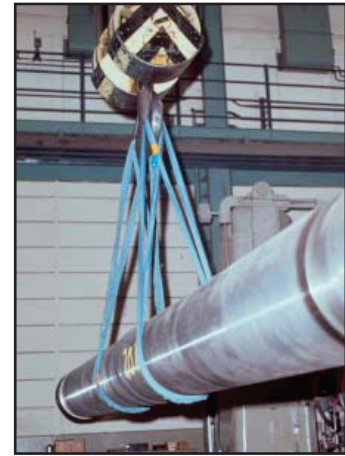

Specifications										
Code	Color	Rated Capacity (lbs.)			Minimum Length (ft)	Approximate Measurements				
		Vertical	Choker	Basket		Weight (lbs. / ft)	Body Dia. Relaxed (in)	Width at Load (in)	Minimum Hardware Dia* (in)	
EN150	Red	13,200	10,600	26,400	3	.8	1 3/8	2	1	
EN240	Blue	21,200	17,000	42,400	3	1.3	1 3/4	2 3/8	1 3/16	
EN360	Grey	31,000	24,800	62,000	3	1.7	2 1/4	3 1/4	1 1/2	
EN600	Brown	53,000	42,400	106,000	8	2.8	2 3/4	4	2	
EN800	Olive	66,000	52,800	132,000	8	3.4	3 3/8	4 3/8	2 1/8	
EN1000	Black	90,000	72,000	180,000	8	4.3	3 3/8	5 1/4	2 1/2	

Green shading reflects rental inventory.



## Roundslings | 5,300 - 90,000 Lbs. (Vertical) | A Series

Specifications									
Sling Size	Vertical Rated Capacity (lbs)	Minimum Edge Radii	Minimum Edge Radii	Sling Wd at Load (ft)	Roundslings Rated Capacity (lbs)	Minimum Hardware Size			
						Stock Dia (in)	Thickness (in)	Effective Contact Wd (in)	(in)
A60	5,300	0.21	1/4	1.293	5,300	0.59	5/8	1.29	1 3/8
A240	21,200	0.41	7/16	32.62	21,200	1.15	1 3/16	2.62	2 3/8
A360	31,000	0.50	1/2	83.15	31,000	1.41	1 1/2	3.15	3 1/4
A600	53,000	0.67	11/16	4.008	53,000	1.90	2	4.00	4
A800	66,000	.072	3/4	4.60	66,000	2.05	2 1/8	4.60	4 3/8
A1000	90,000	0.87	7/8	5.22	90,000	2.46	2 1/2	5.22	5 1/4

Green shading reflects rental inventory.

