


Hydraulic Cylinders | 5 – 55 Ton | H Series | Single Acting – Spring Return

Model H5502


Specifications							
Model	Capacity (Tons)	Stroke (In.)	Collapsed Height (In.)	Oil Capacity (In. ³)	Cylinder Effective Area (In. ²)	Internal Pressure At Capacity (psi)	Weight (Lbs.)
H0505	5	5.08	8.70	5.08	1.00	10,000	3.9
H1006	10	5.94	9.84	13.30	2.24	8,928	9.5
H5502	55	2.01	6.93	21.97	10.98	10,018	33.0

Green shading reflects rental inventory.

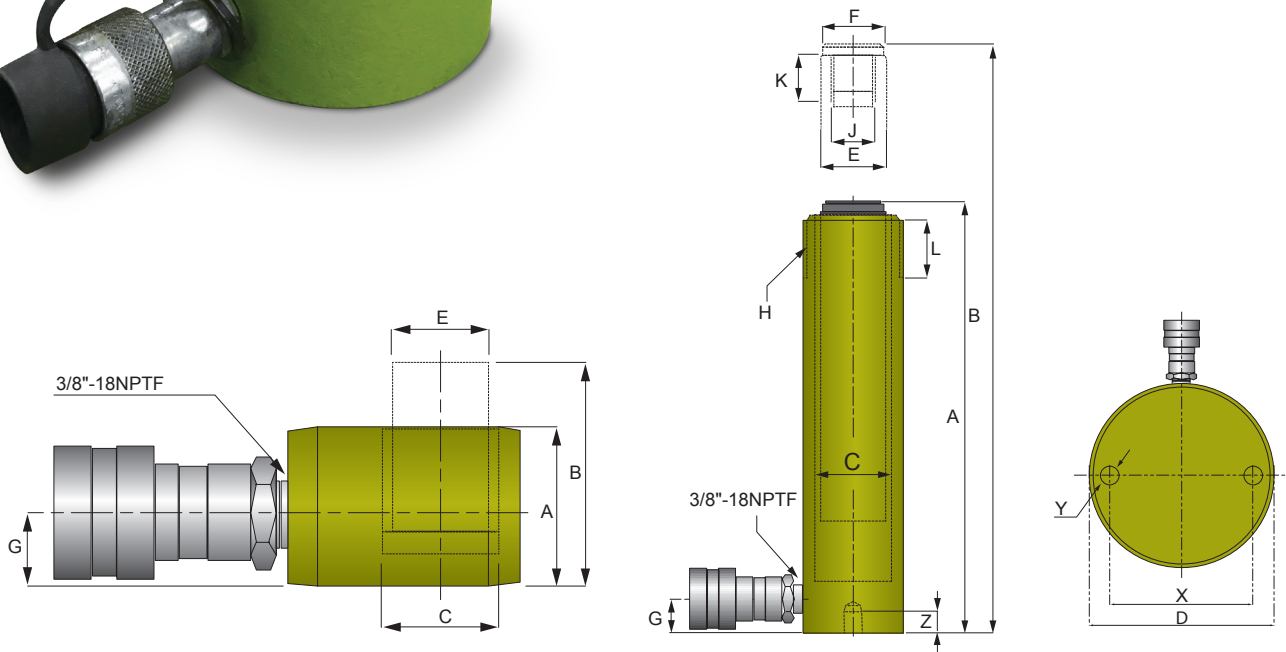

Dimensions														
Model	Collapsed Height A (in.)	Extended Height B (in.)	Cylinder Bore C (in.)	Outside Dia. D (in.)	Rod Dia. E (in.)	Saddle Dia. F (in.)	Base to Inlet Port G (in.)	Collar Thread H (in.)	Collar Thread Length L (in.)	Rod Internal Thread J (in.)	Rod Thread Length K (in.)	Base Mounting Hole (in.)		
												Bolt Circle X	Thread Y	Thread Depth Z
H0505	8.70	13.78	1.13	1.50	1.00	0.98	0.79	1½"-16	1.10	¾"-16UNF	0.63	1.00	1/4"-20UNC	0.55
H1006	9.84	15.78	1.69	2.26	1.49	1.38	0.77	2¼"-14	1.18	1"-8UNC	0.79	1.56	5/16"-18UNC	0.55
H5502	6.93	8.94	3.74	5.00	3.15	2.76	1.22	5-12	2.17	—	—	3.75	1/2"-13UNC	0.75

Green shading reflects rental inventory.