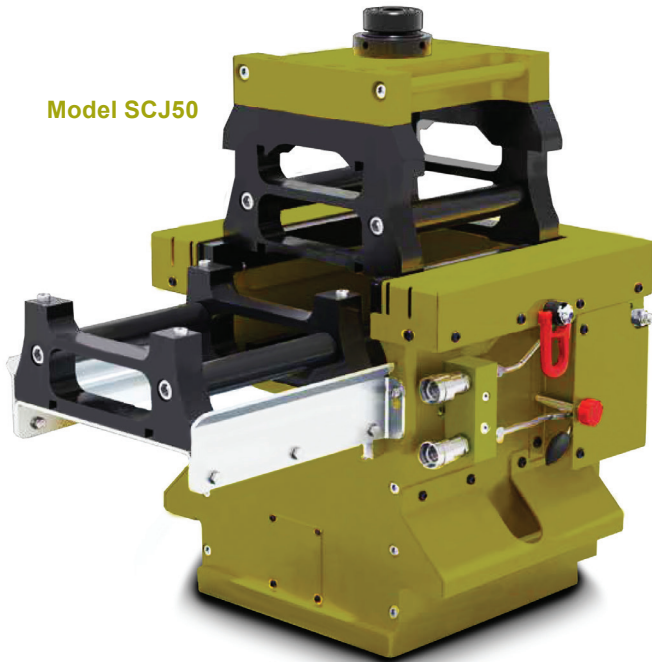
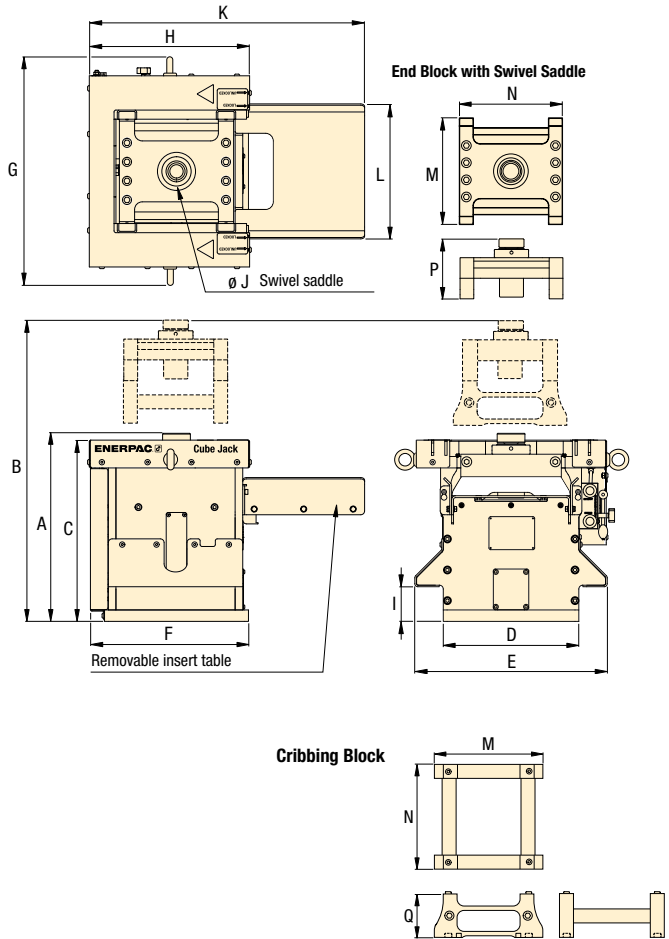


Hydraulic Self-Locking Cube Jack | 56 and 110 ton SCJ-50 and SCJ-100 Series


Model SCJ50


Specifications												
Model	Lifting Capacity per VBase Unit (tons)	Lifting Stroke (in)	Max Side Load at 6.5 ft height	Min Height Including End Block (in)	Max Height (in)	Adjustable Stroke Swivel Saddle (in)	Maximum Allowed Oil Flow (in ³ /min)	Oil Cap. ³ Per Base Unit (in ³)		Weight (lbs)		
								Advanced	Retract	Base Unit ⁴	End Block ¹	Cribbing Block ¹
SCJ50	56	6.14	1.5%	19.4	81.4	2.0	65	75	38	794	88	35
SCJ100	110	6.14	1.5%	22.0	118.3	2.0	110	152	85	1804	220	51.7

Green shading reflects rental inventory.

Dimensions																	
Model	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	I (in)	J (in)	K (in)	L (in)	M (in)	N (in)	P (in)		Q (in)
															(min)	(max)	
SCJ50	19.4	81.4	18.7	14	19.9	17.4	21.9	16.9	3.6	4.92	28.6	13.8	11.8	12.2	6.9	8.9	4.9
SCJ100	22.0	118.3	20.7	19.9	25.8	25.0	30.4	30.4	4.0	6.69	41.2	19.8	17.7	18.1	7.4	9.4	4.9