



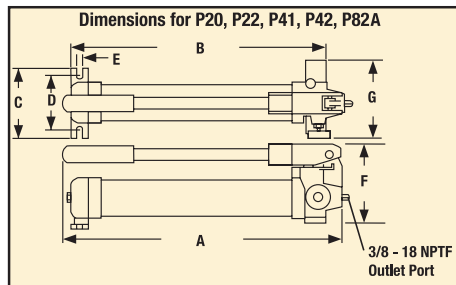

THE LIFTING EXPERTS

(800) 878-7305 www.RentLGH.com Rentals@RentLGH.com

Hydraulic Hand Pumps | 10,000 PSI | P Series

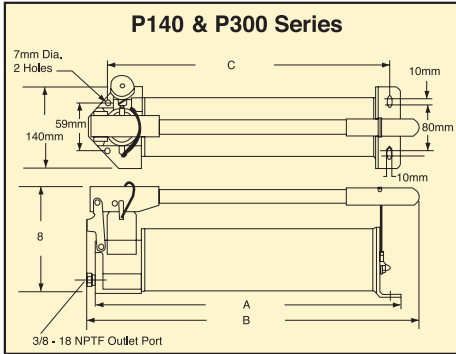

Model P300



Model P140



Model P42

Specifications								
Two Speed Hand Pumps For Single & Double-Acting Cylinders								
Model	Speed	Pressure Rating (PSI)	Oil Volume Per Stroke (cu. in.)	Usable Oil Capacity (cu. in.)	A (in.)	B (in.)	C (in.)	Weight (lbs.)
P140	Single Acting	1 Stage 400	2.8	175	24 ^{13/16}	27 ^{1/4}	23 ^{3/16}	26
	2 Stage 10,000							
P300	Single Acting	1 Stage 400	.24	300	28 ^{1/2}	31	26 ^{1/2}	37
	2 Stage 10,000							

Green shading reflects rental inventory.

Specifications Light Weight Hand Pumps For Single-Acting Cylinders												
Model	Speed	Pressure Rating (PSI)	Oil Volume Per Stroke (cu. in.)	Usable Oil Capacity (cu. in.)	A (in.)	B (in.)	C (in.)	D (in.)	E Slot Size (in.)	F (in.)	G (in.)	Weight (lbs.)
P42	2	1 Stage 200	.79	45	25 ^{41/64}	20 ^{55/64}	3 ^{35/64}	—	—	5 ^{3/4}	5 ^{25/64}	19
		2 Stage 10,000	.16									

Green shading reflects rental inventory.

Hand Pump / Cylinder Speed Chart											
Cylinder Stroke (in)	Strokes Per 1" of Cylinder Travel	Cylinder Capacity (Tons)									
		5 (Ton)	10 (Ton)	15 (Ton)	20 (Ton)	25 (Ton)	30 (Ton)	50/55 (Ton)	60 (Ton)	75 (Ton)	100 (Ton)
P42	NO LOAD	2	3	4	6	7	8	14	17	20	26
	LOAD	7	15	21	31	34	43	73	88	106	137
P140/P300	NO LOAD	1	1	2	2	2	3	5	5	6	8
	LOAD	4	10	14	22	22	27	46	58	66	86

Green shading reflects rental inventory.



All specifications and data relating to capacity, function, performance, size, purpose, or design have been provided by the manufacturer. They have not been independently verified by LGH and LGH makes no representation or warranty as to their accuracy or completeness.